

Inventory Control Form

Large External Fixation and Adjustable Large Fixator



Patient Information:

Synthes (USA)
To Order: (800) 523-0322

Synthes (Canada) Ltd.
To Order: (800) 668-1119

Date: _____


Hospital: _____

Surgeon: _____

Procedure: _____

Large External Fixator

MR Conditional Clamps

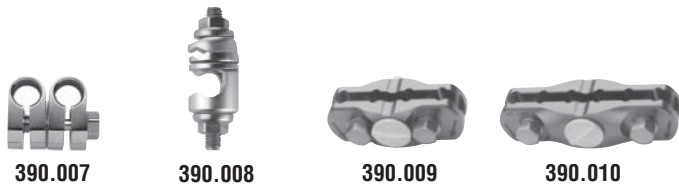

<input type="checkbox"/>	390.002	Large Multi-Pin Clamp, 6 position
<input type="checkbox"/>	390.003	Rod Attachment for Large Multi-Pin Clamp
<input type="checkbox"/>	390.004	Large Multi-Pin Clamp, 4 position
<input type="checkbox"/>	390.005	Large Combination Clamp
<input type="checkbox"/>	390.006	Dynamization Clip, for Large Combination Clamp
<input type="checkbox"/>	390.007	Tube-to-Tube Clamp
<input type="checkbox"/>	390.008	Large Open Adjustable Clamp
<input type="checkbox"/>	390.009	Large Pin Clamp, 4 position
<input type="checkbox"/>	390.010	Large Pin Clamp, 6 position
<input type="checkbox"/>	390.011	Straight Outrigger Post, 11 mm
<input type="checkbox"/>	390.012	30° Outrigger Post, 11 mm
<input type="checkbox"/>	390.013	90° Outrigger Post, 11 mm

Clamps



<input type="checkbox"/>	393.43	Spring-Loaded Nut
<input type="checkbox"/>	393.64	Adjustable Clamp
<input type="checkbox"/>	393.66	Transverse Clamp
<input type="checkbox"/>	393.69	Open Clamp
<input type="checkbox"/>	393.71	Universal Joint for Two Tubes
<input type="checkbox"/>	393.75	Universal Clamp

11.0 mm Carbon Fiber Rods, MR Conditional

LENGTH		LENGTH			
<input type="checkbox"/>	394.80	100 mm	<input type="checkbox"/>	394.87	400 mm
<input type="checkbox"/>	394.81	125 mm	<input type="checkbox"/>	394.88	450 mm
<input type="checkbox"/>	394.82	150 mm	<input type="checkbox"/>	394.89	500 mm
<input type="checkbox"/>	394.83	200 mm	<input type="checkbox"/>	394.90	550 mm
<input type="checkbox"/>	394.84	250 mm	<input type="checkbox"/>	394.91	600 mm
<input type="checkbox"/>	394.85	300 mm	<input type="checkbox"/>	394.92	650 mm
<input type="checkbox"/>	394.86	350 mm			



11.0 mm Curved Carbon Fiber Rods, MR Conditional

SPAN		ANGLE	
<input type="checkbox"/>	394.79	540 mm	180°
<input type="checkbox"/>	394.791	207 mm	45°
<input type="checkbox"/>	394.792	382 mm	90°
<input type="checkbox"/>	394.793	499 mm	135°



Inventory Control Form



Large External Fixation and Adjustable Large Fixator

Large External Fixator (cont'd)

Protective Caps (10/pkg)

<input type="checkbox"/>	394.97	For 11.0 mm Stainless Steel Tubes and Carbon Fiber Rods
<input type="checkbox"/>	394.991	For 4.0 mm fixation pins
<input type="checkbox"/>	394.992	For 4.5 mm fixation pins
<input type="checkbox"/>	394.993	For 5.0 mm fixation pins
<input type="checkbox"/>	394.994	For 6.0 mm fixation pins



Drill Bits

<input type="checkbox"/>	310.37	3.5 mm Drill Bit, 195 mm, quick coupling
<input type="checkbox"/>	310.38	3.5 mm Drill Bit, 180 mm, Jacobs chuck
<input type="checkbox"/>	310.48	4.5 mm Drill Bit, 195 mm, quick coupling
<input type="checkbox"/>	310.49	4.5 mm Drill Bit, 180 mm, Jacobs chuck



Adjustable Large Fixator

<input type="checkbox"/>	392.961	Adjustable Large Fixator
--------------------------	---------	--------------------------



Steinmann Pins, MR Conditional

For use with Large External Fixator

	DIAMETER	LENGTH		DIAMETER	LENGTH
<input type="checkbox"/>	293.44	4.5 mm 120 mm	<input type="checkbox"/>	293.50	5.0 mm 150 mm
<input type="checkbox"/>	293.45	4.5 mm 150 mm	<input type="checkbox"/>	293.51	5.0 mm 180 mm
<input type="checkbox"/>	293.46	4.5 mm 180 mm	<input type="checkbox"/>	293.52	5.0 mm 200 mm
<input type="checkbox"/>	293.47	4.5 mm 200 mm	<input type="checkbox"/>	293.53	5.0 mm 250 mm
<input type="checkbox"/>	293.48	4.5 mm 250 mm	<input type="checkbox"/>	293.54	5.0 mm 300 mm
<input type="checkbox"/>	293.48L	4.5 mm 275 mm	<input type="checkbox"/>	293.58	5.0 mm 225 mm
<input type="checkbox"/>	293.48X	4.5 mm 300 mm	<input type="checkbox"/>	293.59	5.0 mm 275 mm
<input type="checkbox"/>	293.49	4.5 mm 225 mm			

With Central Thread

For use with Large External Fixator

	DIAMETER	LENGTH		DIAMETER	LENGTH
<input type="checkbox"/>	293.63	4.5 mm 150 mm	<input type="checkbox"/>	293.88	4.5 mm 275 mm
<input type="checkbox"/>	293.68	4.5 mm 180 mm	<input type="checkbox"/>	293.93	4.5 mm 300 mm
<input type="checkbox"/>	293.69	5.0 mm 175 mm	<input type="checkbox"/>	293.790	5.0 mm 225 mm
<input type="checkbox"/>	293.73	4.5 mm 200 mm	<input type="checkbox"/>	293.840	5.0 mm 250 mm
<input type="checkbox"/>	293.74	5.0 mm 200 mm	<input type="checkbox"/>	293.890	5.0 mm 275 mm
<input type="checkbox"/>	293.78	4.5 mm 225 mm	<input type="checkbox"/>	293.940	5.0 mm 300 mm
<input type="checkbox"/>	293.83	4.5 mm 250 mm			

For use in traction

	DIAMETER	LENGTH		DIAMETER	LENGTH
<input type="checkbox"/>	293.35	3.5 mm 120 mm	<input type="checkbox"/>	293.41	4.0 mm 180 mm
<input type="checkbox"/>	293.36	3.5 mm 150 mm	<input type="checkbox"/>	293.42	4.0 mm 200 mm
<input type="checkbox"/>	293.40	4.0 mm 150 mm			

With Central Thread

For use in traction

	DIAMETER	LENGTH		DIAMETER	LENGTH
<input type="checkbox"/>	293.62	4.0 mm 150 mm	<input type="checkbox"/>	293.72	4.0 mm 200 mm
<input type="checkbox"/>	293.67	4.0 mm 180 mm			

Transfixation Pin

<input type="checkbox"/>	294.950	6.0 mm 225 mm
--------------------------	---------	---------------

Large External Fixation and Adjustable Large Fixator

Schanz Screws (stainless steel), MR Conditional

Blunted Trocar Point



		DIAMETER	LENGTH
<input type="checkbox"/>	294.71	4.5 mm	80 mm
<input type="checkbox"/>	294.72	4.5 mm	100 mm
<input type="checkbox"/>	294.73	4.5 mm	125 mm
<input type="checkbox"/>	294.74	4.5 mm	150 mm
<input type="checkbox"/>	294.75	4.5 mm	175 mm
<input type="checkbox"/>	294.76	4.5 mm	200 mm
<input type="checkbox"/>	294.52	5.0 mm	100 mm
<input type="checkbox"/>	294.53	5.0 mm	125 mm
<input type="checkbox"/>	294.54	5.0 mm	150 mm
<input type="checkbox"/>	294.55	5.0 mm	170 mm
<input type="checkbox"/>	294.56	5.0 mm	200 mm
<input type="checkbox"/>	294.57	5.0 mm	250 mm

Trocar Point



		DIAMETER	LENGTH
<input type="checkbox"/>	294.767	4.0/2.5 mm	65 mm
<input type="checkbox"/>	294.768	4.0/2.5 mm	80 mm
<input type="checkbox"/>	294.30	4.0/3.0 mm	80 mm

Spade Point



		DIAMETER	LENGTH
<input type="checkbox"/>	294.43	4.0 mm	60 mm
<input type="checkbox"/>	294.44	4.0 mm	80 mm
<input type="checkbox"/>	294.45	4.0 mm	100 mm
<input type="checkbox"/>	294.46	4.0 mm	120 mm
<input type="checkbox"/>	294.48	4.0 mm	150 mm
<input type="checkbox"/>	294.65	6.0 mm	100 mm
<input type="checkbox"/>	294.66	6.0 mm	130 mm
<input type="checkbox"/>	294.67	6.0 mm	160 mm
<input type="checkbox"/>	294.68	6.0 mm	190 mm

Self-Drilling Schanz Screws, MR Conditional

Stainless Steel



		DIAMETER	LENGTH	THREADED LENGTH
<input type="checkbox"/>	294.769	4.0/2.5 mm	80 mm	20 mm
<input type="checkbox"/>	294.771	4.0/3.0 mm	80 mm	20 mm
<input type="checkbox"/>	294.772	4.0/3.0 mm	100 mm	20 mm
<input type="checkbox"/>	294.773	4.0/3.0 mm	65 mm	18 mm
<input type="checkbox"/>	294.774	4.0 mm	60 mm	20 mm
<input type="checkbox"/>	294.775	4.0 mm	80 mm	20 mm
<input type="checkbox"/>	294.776	4.0 mm	100 mm	30 mm
<input type="checkbox"/>	294.777	4.0 mm	125 mm	40 mm
<input type="checkbox"/>	294.778	4.0 mm	150 mm	40 mm
<input type="checkbox"/>	294.779	4.0 mm	175 mm	40 mm
<input type="checkbox"/>	294.782	5.0 mm	100 mm	30 mm
<input type="checkbox"/>	294.783	5.0 mm	125 mm	40 mm
<input type="checkbox"/>	294.784	5.0 mm	150 mm	60 mm
<input type="checkbox"/>	294.785	5.0 mm	175 mm	60 mm
<input type="checkbox"/>	294.786	5.0 mm	200 mm	80 mm
<input type="checkbox"/>	294.788	5.0 mm	250 mm	80 mm
<input type="checkbox"/>	294.792	6.0 mm	100 mm	30 mm
<input type="checkbox"/>	294.793	6.0 mm	125 mm	40 mm
<input type="checkbox"/>	294.794	6.0 mm	150 mm	60 mm
<input type="checkbox"/>	294.795	6.0 mm	175 mm	60 mm
<input type="checkbox"/>	294.796	6.0 mm	200 mm	80 mm
<input type="checkbox"/>	294.798	6.0 mm	250 mm	80 mm

Titanium



		DIAMETER	LENGTH	THREADED LENGTH
<input type="checkbox"/>	494.769	4.0/2.5 mm	80 mm	20 mm
<input type="checkbox"/>	494.771	4.0/3.0 mm	80 mm	20 mm
<input type="checkbox"/>	494.772	4.0/3.0 mm	100 mm	20 mm
<input type="checkbox"/>	494.774	4.0 mm	60 mm	20 mm
<input type="checkbox"/>	494.775	4.0 mm	80 mm	20 mm
<input type="checkbox"/>	494.776	4.0 mm	100 mm	30 mm
<input type="checkbox"/>	494.777	4.0 mm	125 mm	40 mm
<input type="checkbox"/>	494.778	4.0 mm	150 mm	40 mm
<input type="checkbox"/>	494.779	4.0 mm	175 mm	40 mm
<input type="checkbox"/>	494.782	5.0 mm	100 mm	30 mm
<input type="checkbox"/>	494.783	5.0 mm	125 mm	40 mm
<input type="checkbox"/>	494.784	5.0 mm	150 mm	60 mm
<input type="checkbox"/>	494.785	5.0 mm	175 mm	60 mm
<input type="checkbox"/>	494.786	5.0 mm	200 mm	80 mm
<input type="checkbox"/>	494.788	5.0 mm	250 mm	80 mm
<input type="checkbox"/>	494.792	6.0 mm	100 mm	30 mm
<input type="checkbox"/>	494.793	6.0 mm	125 mm	40 mm
<input type="checkbox"/>	494.794	6.0 mm	150 mm	60 mm
<input type="checkbox"/>	494.795	6.0 mm	175 mm	60 mm
<input type="checkbox"/>	494.796	6.0 mm	200 mm	80 mm
<input type="checkbox"/>	494.798	6.0 mm	250 mm	80 mm

Hydroxyapatite Coated Schanz Screws, sterile, MR Conditional

Blunted Trocar Point (Stainless Steel)

		DIAMETER	LENGTH
<input type="checkbox"/>	294.73SHA	4.5 mm	125 mm
<input type="checkbox"/>	294.74SHA	4.5 mm	150 mm
<input type="checkbox"/>	294.75SHA	4.5 mm	175 mm
<input type="checkbox"/>	294.76SHA	4.5 mm	200 mm
<input type="checkbox"/>	294.52SHA	5.0 mm	100 mm
<input type="checkbox"/>	294.53SHA	5.0 mm	125 mm
<input type="checkbox"/>	294.54SHA	5.0 mm	150 mm
<input type="checkbox"/>	294.55SHA	5.0 mm	170 mm
<input type="checkbox"/>	294.56SHA	5.0 mm	200 mm
<input type="checkbox"/>	294.57SHA	5.0 mm	250 mm

Spade Point (Stainless Steel)

		DIAMETER	LENGTH
<input type="checkbox"/>	294.30SHA	4.0/3.0 mm	80 mm
<input type="checkbox"/>	294.43SHA	4.0 mm	60 mm
<input type="checkbox"/>	294.44SHA	4.0 mm	80 mm
<input type="checkbox"/>	294.45SHA	4.0 mm	100 mm
<input type="checkbox"/>	294.46SHA	4.0 mm	120 mm
<input type="checkbox"/>	294.67SHA	6.0 mm	160 mm
<input type="checkbox"/>	294.68SHA	6.0 mm	190 mm

Self-Drilling (Stainless Steel)

		DIAMETER	LENGTH	THREADED LENGTH
<input type="checkbox"/>	294.771SHA	4.0/3.0 mm	80 mm	20 mm
<input type="checkbox"/>	294.775SHA	4.0 mm	80 mm	20 mm
<input type="checkbox"/>	294.776SHA	4.0 mm	100 mm	30 mm
<input type="checkbox"/>	294.777SHA	4.0 mm	125 mm	40 mm
<input type="checkbox"/>	294.778SHA	4.0 mm	150 mm	40 mm
<input type="checkbox"/>	294.779SHA	4.0 mm	175 mm	40 mm
<input type="checkbox"/>	294.782SHA	5.0 mm	100 mm	30 mm
<input type="checkbox"/>	294.783SHA	5.0 mm	125 mm	40 mm
<input type="checkbox"/>	294.784SHA	5.0 mm	150 mm	60 mm
<input type="checkbox"/>	294.785SHA	5.0 mm	175 mm	60 mm
<input type="checkbox"/>	294.786SHA	5.0 mm	200 mm	80 mm
<input type="checkbox"/>	294.788SHA	5.0 mm	250 mm	80 mm
<input type="checkbox"/>	294.796SHA	6.0 mm	200 mm	80 mm

Self-Drilling (Titanium)

		DIAMETER	LENGTH	THREADED LENGTH
<input type="checkbox"/>	494.771SHA	4.0/3.0 mm	80 mm	20 mm
<input type="checkbox"/>	494.784SHA	5.0 mm	150 mm	60 mm
<input type="checkbox"/>	494.785SHA	5.0 mm	175 mm	60 mm
<input type="checkbox"/>	494.786SHA	5.0 mm	200 mm	80 mm