

# Inventory Control Form



## Titanium Cannulated Tibial Nail-EX, with Proximal bend

Patient Information:

Synthes (USA) To Order: (800) 523-0322	Synthes (Canada) Ltd. To Order: (800) 668-1119
---	---

Date: \_\_\_\_\_

Hospital: \_\_\_\_\_

Surgeon: \_\_\_\_\_

Procedure: \_\_\_\_\_

## Titanium Cannulated Tibial Nails-EX, with Proximal bend, sterile

### 8.0 mm diameter



	LENGTH		LENGTH
<input type="checkbox"/>	04.034.231S 255 mm	<input type="checkbox"/>	04.034.252S 360 mm
<input type="checkbox"/>	04.034.234S 270 mm	<input type="checkbox"/>	04.034.255S 375 mm
<input type="checkbox"/>	04.034.237S 285 mm	<input type="checkbox"/>	04.034.258S 390 mm
<input type="checkbox"/>	04.034.240S 300 mm	<input type="checkbox"/>	04.034.261S 405 mm
<input type="checkbox"/>	04.034.243S 315 mm	<input type="checkbox"/>	04.034.264S 420 mm
<input type="checkbox"/>	04.034.246S 330 mm	<input type="checkbox"/>	04.034.267S 435 mm
<input type="checkbox"/>	04.034.249S 345 mm		

### 11.0 mm diameter

	LENGTH		LENGTH
<input type="checkbox"/>	04.034.531S 255 mm	<input type="checkbox"/>	04.034.552S 360 mm
<input type="checkbox"/>	04.034.534S 270 mm	<input type="checkbox"/>	04.034.555S 375 mm
<input type="checkbox"/>	04.034.537S 285 mm	<input type="checkbox"/>	04.034.558S 390 mm
<input type="checkbox"/>	04.034.540S 300 mm	<input type="checkbox"/>	04.034.561S 405 mm
<input type="checkbox"/>	04.034.543S 315 mm	<input type="checkbox"/>	04.034.564S 420 mm
<input type="checkbox"/>	04.034.546S 330 mm	<input type="checkbox"/>	04.034.567S 435 mm
<input type="checkbox"/>	04.034.549S 345 mm		

### 9.0 mm diameter

	LENGTH		LENGTH
<input type="checkbox"/>	04.034.331S 255 mm	<input type="checkbox"/>	04.034.352S 360 mm
<input type="checkbox"/>	04.034.334S 270 mm	<input type="checkbox"/>	04.034.355S 375 mm
<input type="checkbox"/>	04.034.337S 285 mm	<input type="checkbox"/>	04.034.358S 390 mm
<input type="checkbox"/>	04.034.340S 300 mm	<input type="checkbox"/>	04.034.361S 405 mm
<input type="checkbox"/>	04.034.343S 315 mm	<input type="checkbox"/>	04.034.364S 420 mm
<input type="checkbox"/>	04.034.346S 330 mm	<input type="checkbox"/>	04.034.367S 435 mm
<input type="checkbox"/>	04.034.349S 345 mm		

### 12.0 mm diameter

	LENGTH		LENGTH
<input type="checkbox"/>	04.034.631S 255 mm	<input type="checkbox"/>	04.034.652S 360 mm
<input type="checkbox"/>	04.034.634S 270 mm	<input type="checkbox"/>	04.034.655S 375 mm
<input type="checkbox"/>	04.034.637S 285 mm	<input type="checkbox"/>	04.034.658S 390 mm
<input type="checkbox"/>	04.034.640S 300 mm	<input type="checkbox"/>	04.034.661S 405 mm
<input type="checkbox"/>	04.034.643S 315 mm	<input type="checkbox"/>	04.034.664S 420 mm
<input type="checkbox"/>	04.034.646S 330 mm	<input type="checkbox"/>	04.034.667S 435 mm
<input type="checkbox"/>	04.034.649S 345 mm		

### 10.0 mm diameter

	LENGTH		LENGTH
<input type="checkbox"/>	04.034.431S 255 mm	<input type="checkbox"/>	04.034.452S 360 mm
<input type="checkbox"/>	04.034.434S 270 mm	<input type="checkbox"/>	04.034.455S 375 mm
<input type="checkbox"/>	04.034.437S 285 mm	<input type="checkbox"/>	04.034.458S 390 mm
<input type="checkbox"/>	04.034.440S 300 mm	<input type="checkbox"/>	04.034.461S 405 mm
<input type="checkbox"/>	04.034.443S 315 mm	<input type="checkbox"/>	04.034.464S 420 mm
<input type="checkbox"/>	04.034.446S 330 mm	<input type="checkbox"/>	04.034.467S 435 mm
<input type="checkbox"/>	04.034.449S 345 mm		

### 13.0 mm diameter

	LENGTH		LENGTH
<input type="checkbox"/>	04.034.731S 255 mm	<input type="checkbox"/>	04.034.752S 360 mm
<input type="checkbox"/>	04.034.734S 270 mm	<input type="checkbox"/>	04.034.755S 375 mm
<input type="checkbox"/>	04.034.737S 285 mm	<input type="checkbox"/>	04.034.758S 390 mm
<input type="checkbox"/>	04.034.740S 300 mm	<input type="checkbox"/>	04.034.761S 405 mm
<input type="checkbox"/>	04.034.743S 315 mm	<input type="checkbox"/>	04.034.764S 420 mm
<input type="checkbox"/>	04.034.746S 330 mm	<input type="checkbox"/>	04.034.767S 435 mm
<input type="checkbox"/>	04.034.749S 345 mm		

# Inventory Control Form

## Titanium Cannulated Tibial Nail-EX, with Proximal bend



### Screws

#### 5.0 mm Titanium Dual Core Locking Screws, with T25 StarDrive recess



		LENGTH	
	04.015.518S	28 mm	(sterile only)
	04.015.520	30 mm	
	04.015.522S	32 mm	(sterile only)
	04.015.525	35 mm	
	04.015.527S	37 mm	(sterile only)
	04.015.530	40 mm	
	04.015.532S	42 mm	(sterile only)
	04.015.535	45 mm	
	04.015.537S	47 mm	(sterile only)
	04.015.540	50 mm	
	04.015.542S	52 mm	(sterile only)
	04.015.545	55 mm	
	04.015.547S	57 mm	(sterile only)
	04.015.550	60 mm	
	04.015.552S	62 mm	(sterile only)
	04.015.555	65 mm	
	04.015.557S	67 mm	(sterile only)
	04.015.560	70 mm	
	04.015.562S	72 mm	(sterile only)
	04.015.565	75 mm	
	04.015.567S	77 mm	(sterile only)
	04.015.570	80 mm	
	04.015.572S	82 mm	(sterile only)
	04.015.575	85 mm	
	04.015.577S	87 mm	(sterile only)
	04.015.580	90 mm	

#### 5.0 mm Titanium Locking Screws, with T25 StarDrive recess



	LENGTH		LENGTH	
	04.005.516	26 mm	04.005.548	58 mm
	04.005.518	28 mm	04.005.550	60 mm
	04.005.520	30 mm	04.005.552	62 mm
	04.005.522	32 mm	04.005.554	64 mm
	04.005.524	34 mm	04.005.556	66 mm
	04.005.526	36 mm	04.005.558	68 mm
	04.005.528	38 mm	04.005.560	70 mm
	04.005.530	40 mm	04.005.562	72 mm
	04.005.532	42 mm	04.005.564	74 mm
	04.005.534	44 mm	04.005.566	76 mm
	04.005.536	46 mm	04.005.568	78 mm
	04.005.538	48 mm	04.005.570	80 mm
	04.005.540	50 mm	04.005.575	85 mm
	04.005.542	52 mm	04.005.580	90 mm
	04.005.544	54 mm	04.005.585	95 mm
	04.005.546	56 mm	04.005.590	100 mm

#### 4.0 mm Titanium Locking Screws, with T25 StarDrive recess



	LENGTH		LENGTH	
	04.005.408	18 mm	04.005.440	50 mm
	04.005.410	20 mm	04.005.442	52 mm
	04.005.412	22 mm	04.005.444	54 mm
	04.005.414	24 mm	04.005.446	56 mm
	04.005.416	26 mm	04.005.448	58 mm
	04.005.418	28 mm	04.005.450	60 mm
	04.005.420	30 mm	04.005.452	62 mm
	04.005.422	32 mm	04.005.454	64 mm
	04.005.424	34 mm	04.005.456	66 mm
	04.005.426	36 mm	04.005.458	68 mm
	04.005.428	38 mm	04.005.460	70 mm
	04.005.430	40 mm	04.005.462	72 mm
	04.005.432	42 mm	04.005.464	74 mm
	04.005.434	44 mm	04.005.466	76 mm
	04.005.436	46 mm	04.005.468	78 mm
	04.005.438	48 mm	04.005.470	80 mm

#### 4.0 mm Titanium Locking Screws, with 3.5 mm hexagonal recess




	LENGTH		LENGTH	
	458.826	26 mm	458.854	54 mm
	458.828	28 mm	458.856	56 mm
	458.830	30 mm	458.858	58 mm
	458.832	32 mm	458.860	60 mm
	458.834	34 mm	458.862	62 mm
	458.836	36 mm	458.864	64 mm
	458.838	38 mm	458.866	66 mm
	458.840	40 mm	458.868	68 mm
	458.842	42 mm	458.870	70 mm
	458.844	44 mm	458.872	72 mm
	458.846	46 mm	458.874	74 mm
	458.848	48 mm	458.876	76 mm
	458.850	50 mm	458.878	78 mm
	458.852	52 mm	458.880	80 mm

# Titanium Cannulated Tibial Nail—EX, with Proximal bend

## Screws (cont'd)


### 5.0 mm Titanium Locking Screws, with 3.5 mm hexagonal recess <sup>◇</sup>

	LENGTH		LENGTH		
<input type="checkbox"/>	458.926	26 mm	<input type="checkbox"/>	458.954	54 mm
<input type="checkbox"/>	458.928	28 mm	<input type="checkbox"/>	458.956	56 mm
<input type="checkbox"/>	458.930	30 mm	<input type="checkbox"/>	458.958	58 mm
<input type="checkbox"/>	458.932	32 mm	<input type="checkbox"/>	458.960	60 mm
<input type="checkbox"/>	458.934	34 mm	<input type="checkbox"/>	458.964	64 mm
<input type="checkbox"/>	458.936	36 mm	<input type="checkbox"/>	458.968	68 mm
<input type="checkbox"/>	458.938	38 mm	<input type="checkbox"/>	458.972	72 mm
<input type="checkbox"/>	458.940	40 mm	<input type="checkbox"/>	458.976	76 mm
<input type="checkbox"/>	458.942	42 mm	<input type="checkbox"/>	458.980	80 mm
<input type="checkbox"/>	458.944	44 mm	<input type="checkbox"/>	458.985	85 mm
<input type="checkbox"/>	458.946	46 mm	<input type="checkbox"/>	458.990	90 mm
<input type="checkbox"/>	458.948	48 mm	<input type="checkbox"/>	458.995	95 mm
<input type="checkbox"/>	458.950	50 mm	<input type="checkbox"/>	458.999	100 mm
<input type="checkbox"/>	458.952	52 mm			



### Titanium End Caps, with T40 StarDrive recess <sup>◇</sup>


	EXTENSION	
<input type="checkbox"/>	04.004.000	0 mm, Gold
<input type="checkbox"/>	04.004.001	5 mm, Gold
<input type="checkbox"/>	04.004.002	10 mm, Gold
<input type="checkbox"/>	04.004.003	15 mm, Gold
<input type="checkbox"/>	04.004.008	0 mm, Gray
<input type="checkbox"/>	04.004.009	5 mm, Gray
<input type="checkbox"/>	04.004.010	10 mm, Gray
<input type="checkbox"/>	04.004.011	15 mm, Gray



## Instruments


### Guide Wire

		DIAMETER	LENGTH
<input type="checkbox"/>	357.399	3.2 mm	400 mm




### Drill Bit—Cannulated <sup>◇</sup>

<input type="checkbox"/>	03.010.036	12.0 mm, large quick coupling, 190 mm
<input type="checkbox"/>	03.010.439	12.0 mm, large quick coupling, 270 mm




### Drill Bits—Three-Fluted <sup>◇</sup>

<input type="checkbox"/>	03.010.060	3.2 mm, quick coupling, 330 mm, 100 mm calibration
<input type="checkbox"/>	03.010.061	4.2 mm, quick coupling, 330 mm, 100 mm calibration
<input type="checkbox"/>	03.010.103	3.2 mm, quick coupling, needle point, 145 mm
<input type="checkbox"/>	03.010.104	4.2 mm, quick coupling, needle point, 145 mm
<input type="checkbox"/>	03.010.100	3.2 mm, quick coupling, radiolucent drive
<input type="checkbox"/>	03.010.101	4.2 mm, quick coupling, radiolucent drive

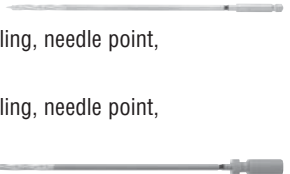

### Reaming Rods

<input type="checkbox"/>	351.706S	2.5 mm, with ball tip, 950 mm, sterile
<input type="checkbox"/>	351.708S	2.5 mm, with ball tip, 1150 mm, sterile
<input type="checkbox"/>	351.707S	2.5 mm, with ball tip and extension, 950 mm, sterile
<input type="checkbox"/>	351.704S	2.5 mm with ball tip and extension, 1150 mm, sterile
<input type="checkbox"/>	351.71 <sup>◇</sup>	3.0 mm, with offset ball tip, 950 mm
<input type="checkbox"/>	351.76 <sup>◇</sup>	3.0 mm, 950 mm

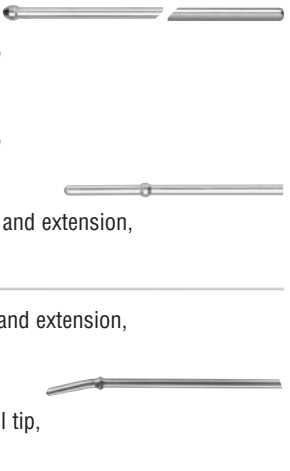

### Suprapatellar Outer Protection Sleeves

<input type="checkbox"/>	03.010.437S	12.0 mm, sterile
<input type="checkbox"/>	03.010.438S	14.5 mm, sterile

